

# R RANDALL Bustin R.O.M. ACCESS PRODUCTS

Jump to the Task, Not the Ground



LEARN MORE @ [SFTRUCKANDTRAILER.NET](http://SFTRUCKANDTRAILER.NET) OR CALL: 800.323.7424

SAFE  FLEET  
*Driving Safety Forward™*



# WALK RAMPS

## Jump to the Task, Not the Ground

Anywhere secure footing and stability are crucial to job performance, you can count on our slip-resistant walk ramps to help you get it done safely. Our products are made to handle the demands of the delivery world by industry-leading brands ROM., and Randall. They help drivers and operators avoid injury on the job while improving overall efficiency and productivity.

### The Safe Fleet Difference:

- **Safe access to rear and side doors**  
Allows drivers to safely access the trailer by attaching to the trailer floor or side-door platforms with standard attachments.
- **Self-cleaning walk surfaces**  
Open design prevents debris build up on the walk surface.
- **Corrosion resistant materials**  
Ramps are constructed to withstand the elements.
- **Aggressive slip resistant surface**  
All weather ramp surface provides aggressive traction across the entire ramp width enhance delivery speed and productivity.



# WALK RAMPS



## RANDALL STRAIGHT WALK RAMP

Highly engineered, ultra-durable, safety walk ramp

Features include an Extruded 6061 aluminum alloy, Randall's signature aggressive walk surface, replaceable and repairable panels. Options include the two Lift Assist to meet varying deck heights; open and fully enclosed carrier.

SPECIFICATIONS								
NOMINAL RAMP LENGTH	RAMP WIDTH AT WIDEST PT (APRON)	RAMP WIDTH (OD)	USABLE WIDTH	RAMP HEIGHT	RECOMMENDED DECK HEIGHT	APPROX WEIGHT	APPROX WT WITH LIFT ASST	LOAD CPTY
16' (Wide Ramp)	31 5/16"	31"	29 5/8"	4 5/8"	56"-66"	145 lbs.	175 lbs.	1,000 lbs.
16'	26 1/4"	25 7/8"	24 1/2"	4 5/8"	56"-66"	125 lbs.	155 lbs.	1,000 lbs.
14'	26 1/4"	25 7/8"	24 1/2"	4 5/8"	46"-55"	112 lbs.	143 lbs.	1,000 lbs.



WALK RAMPS



ERGONOMIC HANDLES



REVERSIBLE PANEL DESIGN



LIFT ASSIST OPTION

ROM ROADWARRIOR™ WALK RAMP

Time-tested, reversible, ready-to-get-to-work walk ramp

Features include a lightweight cast-magnesium grating, aluminum side rails, steel bolted fasteners construction, reversible panel design and walk surface featuring traction nubs with a staggered pattern.

Options: Lift Assist, and open and fully enclosed carriers.

SPECIFICATIONS						
NOMINAL RAMP LENGTH	RAMP WIDTH	USABLE WIDTH	RAMP HEIGHT	RECOMMENDED DECK HEIGHT	APPROXIMATE WEIGHT	LOAD CAPACITY
16'	25 7/8"	24 1/2"	4 5/8"	57"-64"	127 lbs.	1,000 lbs.
14'	25 7/8"	24 1/2"	4 5/8"	47"-56"	115 lbs.	1,000 lbs.
12'	25 7/8"	24 1/2"	4 5/8"	39"-46"	98 lbs.	1,000 lbs.
10'	25 7/8"	24 1/2"	4 5/8"	31"-38"	85 lbs.	1,000 lbs.
8'	25 7/8"	24 1/2"	4 5/8"	26"-30"	65 lbs.	1,000 lbs.

\*Ramp OD at Apron is 26 1/4".  
\*Maximum widths are shown. Narrower custom sizes are available in 1" increments (OD): 24 7/8", 23 7/8", 22 7/8", & 21 7/8". Minimum order quantities may apply.

WALK RAMPS



EASY TO TRANSITION TOE PLATE



REVERSIBLE PANEL DESIGN



LOCKS INTO PLACE

ROM ROADWARRIOR™ LOW PROFILE (LP) WALK RAMP

Quality, durability, performance for straight truck bodies

Features a lightweight cast-magnesium grating with aluminum side rails and has steel bolted construction. The Model R fits most existing carriers; new or retrofit while the Model C uses a C-track mount and a carrier isn't necessary.

SPECIFICATIONS						
NOMINAL RAMP LENGTH	USABLE WIDTH	RAMP WIDTH* (OD)	RAMP HEIGHT	MODEL R	MODEL C	RECOMMENDED DECK HEIGHT
16'	24 1/2"	26 5/16"	3 3/4"	16' 6 5/16"	16' 8 3/8"	57"-64"
14"	24 1/2"	26 5/16"	3 3/4"	15' 3/16"	15' 1 5/8"	47"-56"
12'	24 1/2"	26 5/16"	3 3/4"	12' 8 1/16"	12' 9 1/2"	39"-46"
10'	24 1/2"	26 5/16"	3 3/4"	11' 1 5/16"	11' 2 3/4"	31"-38"

\*Maximum widths are shown. Smaller custom sizes are available in 1" increments: 22 15/16", 23 15/16", 24 15/16", and 25 15/16"




WALK RAMPS



OPEN LEG DESIGN



HIGH-TRACTION, ALL-WEATHER WALK SURFACE

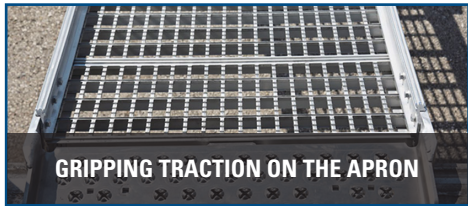

GRIPPING TRACTION ON THE APRON

RANDALL FOLDING WALK RAMP

Durable, easy on your legs and back, and keeps all ten digits safe

Features extruded 6061 aluminum alloy, Randall's signature aggressive walk surface, open leg design with optional finger guards, 5" retractable wheels and a recessed latch and deflector plate for easier and safer deployment.

DEPLOYED SPECIFICATIONS							
RAMP LENGTH	USABLE WIDTH	RAMP WIDTH	RAMP HEIGHT	USABLE SIDE RAIL	REC'D DECK HEIGHT	APPROX. WEIGHT	LOAD CAPACITY
14'	24 3/8"	25 7/8"	4 5/8"	2 1/16"	47"-56"	154 lbs.	1,000 LBS.*

\*Testing of ramps was conducted between 15 and 20 degrees. Load tests were conducted with a 500 lbs. load and 225 lbs. driver.

OPTIONAL CARRIER SPECIFICATIONS**				
	CARRIER LENGTH	WIDTH & HEIGHT CARRIER BODY	WIDTH & HEIGHT AT DOOR	APPROXIMATE WEIGHT
	8'	31" X 10 1/2"	32" X 12 3/4"	222 LBS.

\*\*Randall Access Walkramps also fit all competitive enclosures.  
Note: Bottom of enclosure to ground must be a minimum of 26 inches.

WALK RAMPS



EASY TRANSITION TOE PLATE



WELDED STEEL LEGS



LARGE WHEELS HANDLE TERRAIN

ROM SIDEKICK™ FOLDING WALK RAMP

The only reversible folding walk ramp available

Features include a portable, lightweight cast-magnesium grating, welded steel legs, aluminum side rails, cast aluminum handles, steel bolted fastener construction, single door and double door carrier options and a reversible design.

DEPLOYED SPECIFICATIONS						
NOMINAL RAMP LENGTH	USABLE WIDTH	RAMP WIDTH	RAMP HEIGHT	RECOMMENDED DECK HEIGHTS	APPROXIMATE WEIGHT	LOAD CAPACITY
14'	24 1/2"	25 7/8"	4 5/8"	47"-56"	154 lbs.	1,000 lbs.*

\*Testing of ramps was conducted between 15 and 20 degrees. Load tests were conducted with a 500 lbs. load and 225 lbs. driver.

OPTIONAL CARRIER SPECIFICATIONS			
CARRIER LENGTH	WIDTH & HEIGHT CARRIER BODY	WIDTH & HEIGHT AT DOOR	APPROXIMATE WEIGHT
8'	31" X 10 1/2"	32 1/2" X 12 3/4"	222 LBS.



# PLATFORMS, STEPS & LADDERS

BUSTIN PLATFORM SPECIFICATIONS								
MODEL	PLATFORM SIZE	WEIGHT CAPACITY	ATTACHED LADDER	RAMP READY	LADDER READY	SAFETY HANDLE	USE AT FRONT DOOR	USE AT MIDDLE DOOR
F100	33 ¼" W X 26" D	350 lbs.	Optional	No	No	No	No	Yes
	33" W X 21" D	450 lbs.						
	40" W X 30" D	450 lbs.						
SLIDE & GO <small>*steps optional</small>	33" W X 26" D	600 lbs.	No	No	No	Optional	Yes	Yes
SPLIT PLATFORM	33 ⅝" W X 34 ½" D	1000 lbs.	No	Yes	Yes	No	Yes	Yes
	34 ½" W X 34 ½" D							
	43" W X 34 ½" D							
TAP 200	31" W X 22" D	500 lbs.	Yes	No	N/A	No	Yes	Consult w/ OEM
TSAP 210A	31" W X 36 ½" D	1000 lbs.	Yes	Yes	N/A	No	Yes	Consult w/ OEM

RANDALL PLATFORM SPECIFICATIONS								
MODEL	PLATFORM SIZE	WEIGHT CAPACITY	ATTACHED LADDER	RAMP READY	LADDER READY	SAFETY HANDLE	USE AT FRONT DOOR	USE AT MIDDLE DOOR
FDP 3434R	34 ½" W X 34 ½" D	1000 lbs.	No	Yes	Yes	No	Yes	Yes
FDP 4334R	43" W X 34 ½" D	1000 lbs.	No	Yes	Yes	No	Yes	Yes
FDP 3123L	31" W X 23" D	500 lbs.	Yes	No	N/A	No	Yes	Consult w/ OEM
FDP 3136LR	31" W X 36" D	1000 lbs.	Yes	Yes	N/A	Yes	Yes	Consult w/ OEM
FDP 4128LH	41" W X 28" D	500 lbs.	No	No	N/A	Yes	Consult w/ OEM	N/A

## PLATFORMS

### BUSTIN F100 SERIES PLATFORM

Middle door, meet your new under floor platform friend

Features platform widths ranging from 33" to 40", mounts to the trailer frame, has steel construction and aluminum is available. Also has serrated, open grating work surface and works well with the optional Bustin ladder.

SPECIFICATIONS							
PART #	MTL	WIDTH	DEPTH	WT	WT CAPACITY	OPTIONAL LADDER	MTG SIZE
F102	Aluminum	33 ¼"	26"	90 lbs.	350 lbs.	F102A	38" W x 48" D
F105HD	HD Steel	33"	21"	64 lbs.	450 lbs.	F-510	38" W x 30" D
F110	Steel	40"	30"	125 lbs.	450 lbs.	F-510	45" W x 60" D



### BUSTIN SLIDE & GO PLATFORM

Space saver, compact design, stability

Features a compact, under floor platform. Can be used as a platform along or with Slide-Away™ step system. Has Aluminum construction with the landing dimensions of 33" wide and 26" Deep. The platform requires only 28" of installation space.

SPECIFICATIONS								
PART #	MTL	LNDG W	LNDG D	TOP OF GRGTG	STEPS	PROD WT	WT CPTY	TRAILER SPECS
SG-100	Al	33"	26"	2" below body crossbars	N/A	170 lbs.	600 lbs.	Platform only
SG-101	Al	33"	26"		2	205 lbs.	600 lbs. platform; 350 lbs. stairs	Includes Slide-Away Step. Ideal mounting height 36"-42"
SG-102	Al	33"	26"		3	218 lbs.		Includes Slide-Away Step. Ideal mounting height 44"-52"



### BUSTIN TAP200A PLATFORM

Pick a door, any door... TAP200 is at your service

The Platform is welded aluminum and can be used at any side door, in multiple applications. The integrated ladder has 4 steps and has a modular construction, allows for each step to be replaced in the field. The ladder folds flat inside the enclosure, which is sold separately.

SPECIFICATIONS						
MTL	LANDING WIDTH	LANDING DEPTH	TOP OF GRATING	STEPS	PRODUCT WEIGHT	WEIGHT CAPACITY
Al	31"	22"	56 ½"	4	68 lbs.	500 lbs.





# PLATFORMS



## BUSTIN SPLIT PLATFORM

Works with a ladder or walk ramp

Features a 1 ½” space between panels and allows the platform to straddle floor-support-beams within the tunnel, allowing a robust floor load capacity. The platform is ramp or ladder ready and mounts in the trailer floor. The working capacity is 1,000 pounds.

SPECIFICATIONS					
PART #	MATERIAL	LNDG W	LNDG D	PROD WT	WT CPTY
124-APD-026	Aluminum	33 5/8”	34 ½”	74 lbs.	1,000 lbs.
349-APD-022	Aluminum	34 ½”	34 ½”	66 lbs.	1,000 lbs.
349-APD-027	Aluminum	34 ½”	34 ½”	66 lbs.	1,000 lbs.
349-APD-026	Aluminum	43”	34 ½”	90 lbs.	1,000 lbs.



## BUSTIN TSAP210 PLATFORM

Also known as “The Double Deck”

Features an expansive 30 15/16” x 36 1/3” D platform surface made of extruded aluminum. The optional integrated ladder has 4 steps and has a modular construction, allows for each step to be replaced in the field. The ladder folds flat inside the enclosure with a ramp and ladder ready design.

SPECIFICATIONS						
MTL	LANDING WIDTH	LANDING DEPTH	TOP OF GRATING	STEPS	PRODUCT WEIGHT	WEIGHT CAPACITY
Al 6061-T6	31”	36 ½”	57”	4	110 lbs.	1,000 lbs.



## RANDALL FDP 3434R / 4334R PLATFORM

Side Door, Ramp or Ladder-Ready Floor Deployed Platform

Has an all-weather surface provides superior continuous traction flexibility to attach a ramp or ladder in the parallel or perpendicular positions. The split platform is designed with a 1 ½” space between panels allows the platform to straddle floor-support beams within the tunnel.

SPECIFICATIONS						
MTL	WIDTH	DEPTH	# OF PANELS	REQ TNL HT	PLT W/O WT	WT CAPACITY
Al 6061-T6	34 ½”	34 ½”	3	3”	65 lbs.	1,000 lbs.
Al 6061-T6	43”	34 ½”	4	3”	88 lbs.	1,000 lbs.

# PLATFORMS



## RANDALL FDP 3123L

Floor Deployed Platform (FDP) side door delivery

Features a 31” W x 23” D platform surface made of extruded aluminum (6061 T6 allow). Randall’s signature gripping, all-weather surface is on the platform and steps. The integrated ladder has 4 steps that fold into the tunnel within platform. Has slider pads and rollers for easy deployment and stowage.

SPECIFICATIONS								
MATERIAL	W	D	STAIR LENGTH	DECK HTS	STPS	REQ TNL HT	WT W/ TUNNEL	WT CPTY
Al 6061-T6	31”	23”	53”	44” - 49”	3	3”	365 lbs.	500 lbs.
Al 6061-T6	31”	23”	58”	50” - 56”	4	3”	370 lbs.	500 lbs.


\*The adjustable ladder model accommodates varying deck heights from 48” to 56”.

## RANDALL FDP 3136LR

36” deep, integrated ladder and ramp ready—let’s get to work

Features a 36” deep work surface, integrated ladder and has a 1,000 lb working capacity. The platform is ramp ready and has Randall’s signature gripping, all-weather surface on the platform and steps. Slider pads are included for easy deployment and stowage.

SPECIFICATIONS						
MATERIAL	WIDTH	DEPTH	DECK HEIGHTS	REQ TUNNEL HT	WEIGHT W/ TUNNEL	WEIGHT CAPACITY
Aluminum 6061-T6	31”	36”	50” - 56”	4”	470 lbs.	1,000 lbs.

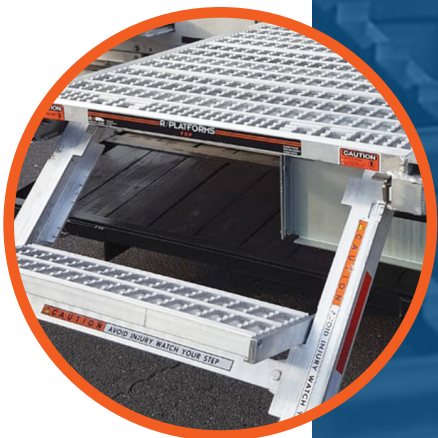

## RANDALL FDP 4128LH

3 points of contact—built in



The platform has an expansive 41” W and 28” D work surface and can be installed on 3” thick insulated floors. The grab handle ensures three points of contact. The platform and steps have Randall’s signature gripping, all-weather surface. Slider pads are included for easy deployment and stowage.

SPECIFICATIONS							
MATERIAL	W	D	DECK HEIGHTS	STEPS	REQ TNL HT	WEIGHT W/ TUNNEL	WEIGHT CAPACITY
Al 6061-T6	41”	28”	50” - 56”	4	3”	475 lbs.	500 lbs.





STEPS

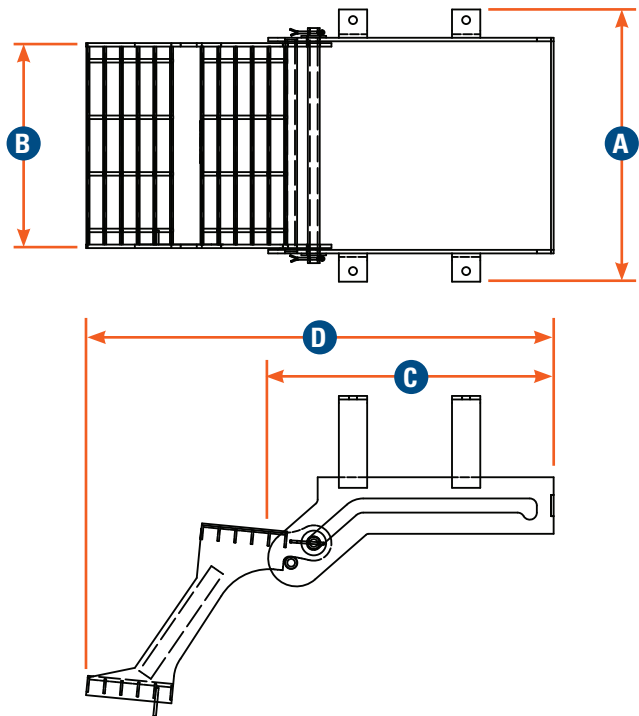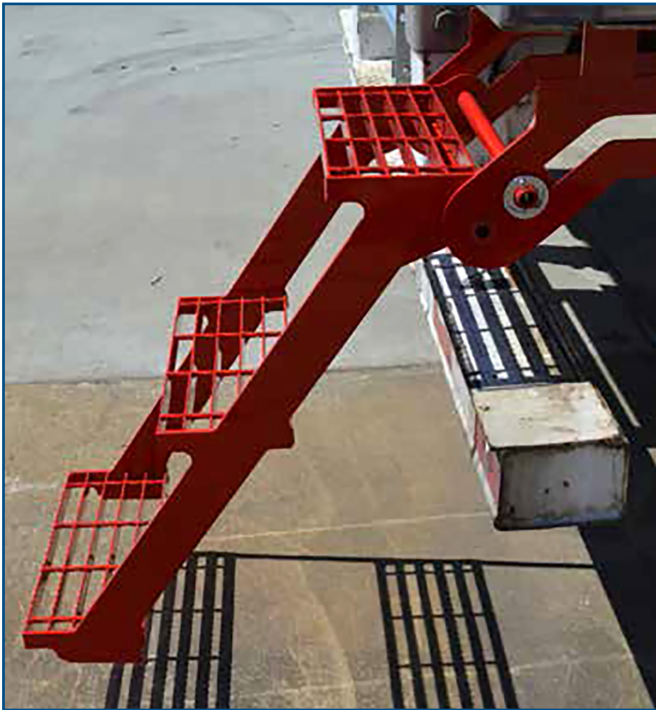

**BUSTIN SLIDE-AWAY™ RETRACTABLE STEP SYSTEM**  
Widely used, self-cleaning, deploys and stows in seconds

Features welded steel construction with bolt-on or weld-on configurations, with rear and side door placement. The Retractable Step has a standard finish in red and black is available upon request. There is also a galvanized finish available on select models. The system weighs 30 pounds with a weight capacity of 350 pounds.

SPECIFICATIONS							
REFERENCE		A	B	---	C	D	---
PART #	DESCRIPTION	TOTAL WIDTH	STAIR WIDTH	TREAD WIDTH	CLOSED LENGTH	OPEN LENGTH	WEIGHT
DB0205	1 Step / Weld on	27 ¼"	26 ½"	6 ⅛"	11 13⁄16"	16 5⁄8"	25 lbs.
DB0206	1 Step / Bolt On	31 ¼"	26 ½"	6 ⅛"	11 13⁄16"	16 5⁄8"	30 lbs.
HB0201	2 Step / Weld On	15 ¼"	14 ½"	6 ⅛"	20 3⁄16"	33 1⁄16"	29 lbs.
DB0201*	2 Step / Bolt On	19 ¼"	14 ½"	6 ⅛"	20 3⁄16"	33 1⁄16"	30 lbs.
DB0204	2 Step / Weld On	27 ¼"	26 ½"	6 ⅛"	20 3⁄16"	33 1⁄16"	38 lbs.
DB0203	2 Step / Bolt On	31 ¼"	26 ½"	6 ⅛"	20 3⁄16"	33 1⁄16"	42 lbs.
HB0202*	3 Step / Weld On	15 ¼"	14 ½"	6 ⅛"	34 3⁄16"	56 5⁄16"	44 lbs.
DB0202*	3 Step / Bolt On	19 ¼"	14 ½"	6 ⅛"	34 3⁄16"	56 5⁄16"	48 lbs.
HB0203	3 Step / Weld On	27 ¼"	26 ½"	6 ⅛"	34 3⁄16"	56 5⁄16"	56 lbs.
HB0204*	3 Step / Bolt On	31 ¼"	26 ½"	6 ⅛"	34 3⁄16"	56 5⁄16"	60 lbs.

\*Available in a galvanized finish with a five unit MOQ. Note: Weight capacity limit for all models is 350 lbs.

LADDERS



**BUSTIN LADDER & PLATFORM SYSTEM**  
Versatility, portability, lightweight ladder & platform system

Features a Bustin portable ladder-equipped with stainless steel hooks to attach to the flat bar strap mounted on the outside of the trailer. You can add a platform to the ladder and you have an all-in-one system that’s portable, versatile, and weights less than 50 pounds. The optional carrier locks the ladder and platform system in place.

PORTABLE LADDER SPECIFICATIONS				
MATERIAL	HEIGHT RANGE	STEPS	WEIGHT	WEIGHT CAPACITY
Aluminum	52 ½"	4	26 lbs.	350 lbs.

LADDER & PLATFORM COMBO SPECIFICATIONS					
MATERIAL	LANDING WIDTH	LANDING DEPTH	STEPS	PRODUCT WEIGHT	WEIGHT CAPACITY
Aluminum	21" - 40"	18" - 21 3⁄16"	4	40-45 lbs.	350 lbs.



**ROM SIDESTEP™ PORTABLE LADDER**  
High-strength, high-mobility, high-performer

The SideStep™ Portable Ladder is constructed of lightweight aluminum and works on heights up to 56" and hooks are 13 ½" apart. The ratchet and pawl system adjusts to uneven surfaces and the double handrails provide enhanced stability. The adjustable step angles insure safe footings and the system has an optional fully enclosed carrier.

PORTABLE LADDER SPECIFICATIONS				
MATERIAL	HEIGHT RANGE	STEPS	WEIGHT	WEIGHT CAPACITY
Aluminum	56"	4	27 lbs.	350 lbs.



SAFE FLEET BRAND LOCATIONS

Brand Locations

A

Vancouver, BC

SEON FleetMind

B

Eagan, MN

PRIME DESIGN

C

Gladwin, MI

Roll-Rite

D

El Cajon, CA

PULLTARPS

E

N. Baltimore, OH

Roll-Rite PULLTARPS

F

Brooklyn, NY

RVS

G

Nesconset, NY

FRC FOAMPRO

H

Charlotte, NC

SPECIALTY MANUFACTURING TRANSPEC PRETORIA MobileView

I

Maitland, FL

COBAN Mobile-Vision

J

Elkhart, IN

ELKHART BRASS MIRRORS

K

Elmhurst, IL

R RANDALL

L

Houston, TX

COBAN Mobile-Vision

M

Dovercourt, Essex, UK

DURITE

N

Saffron Walden, Essex, UK

Labcraft DESIGN LED LIGHTING

Service Centers

O

Henderson, CO

Roll-Rite PULLTARPS

P

Chicago, IL

Kerr INDUSTRIES

Q

Toronto, ON

Kerr INDUSTRIES

R

Detroit, MI

Kerr INDUSTRIES

S

Torrington, CT

Roll-Rite

T

Farmingdale, NY

American Van

U

Lodi, NJ

American Van

V

Orlando, FL

American Van

W

Dallas, TX

Kerr INDUSTRIES

Brand Locations & Service Centers

X

Belton, MO  
Lone Jack, MO


ROM R RANDALL Bustin AMFS+

Y

Lakewood, NJ

American Van

SAFE FLEET BRAND LOCATIONS

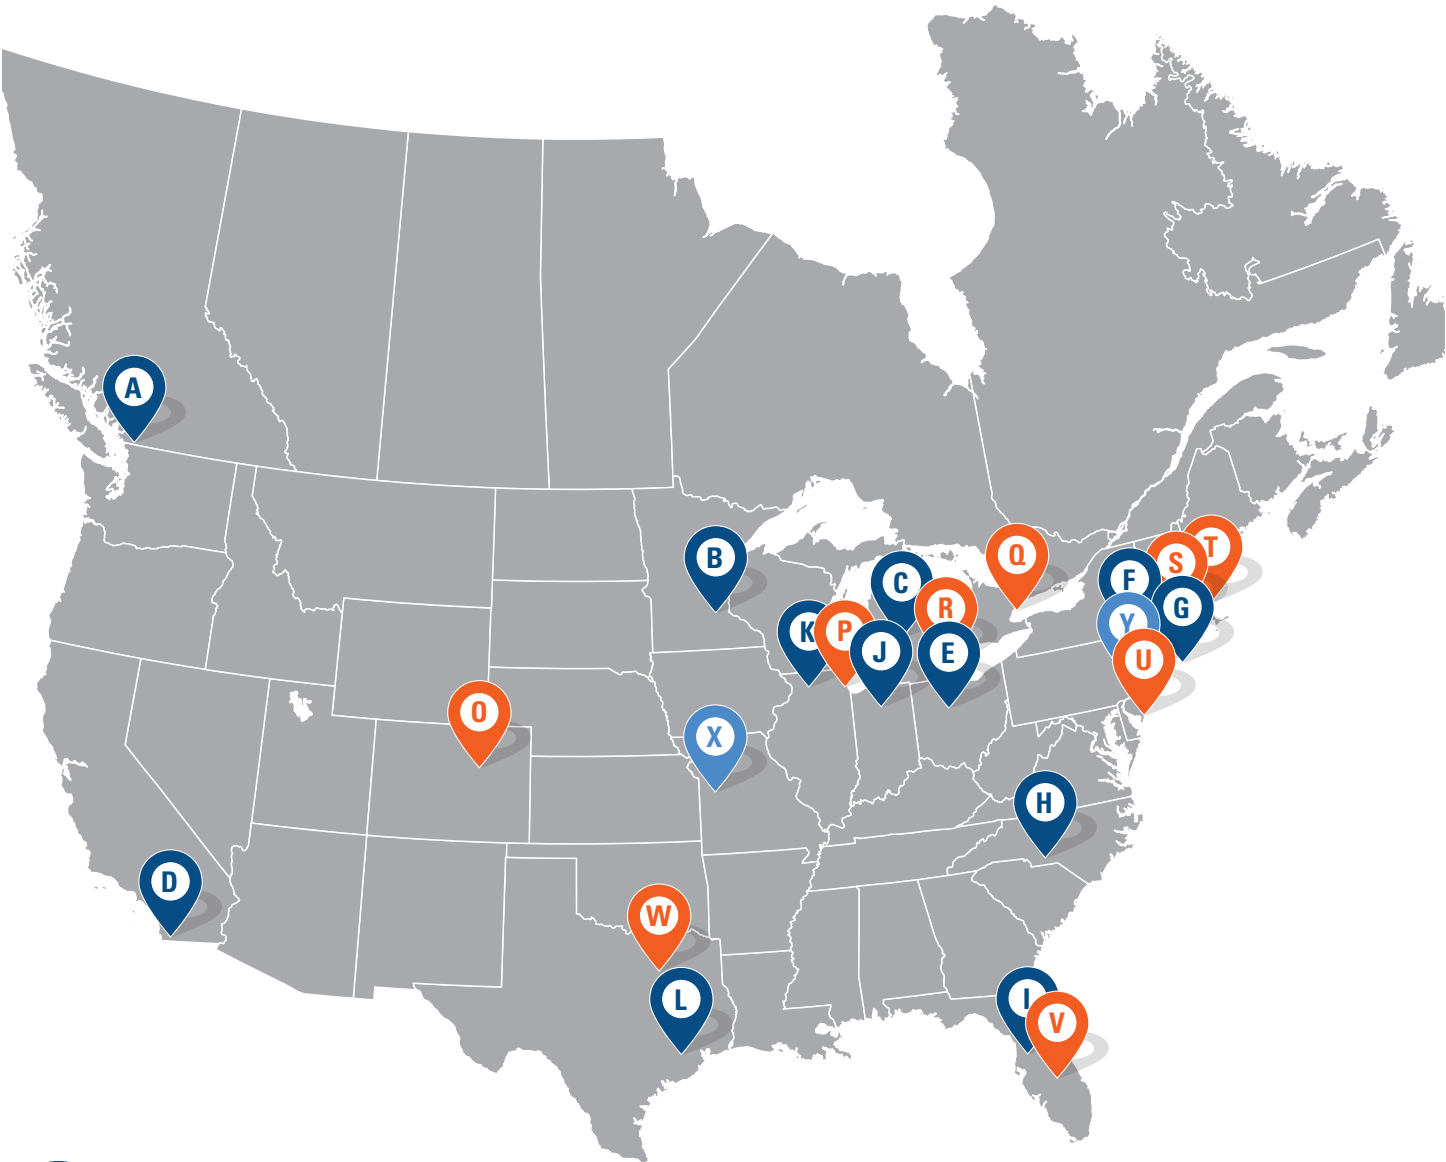

Brand Locations

Service Centers

Brand Locations & Service Centers





As the trusted fleet safety experts, Safe Fleet has a vision to reduce preventable deaths and injuries in and around fleet vehicles. Our best-of-breed smart safety solutions form a uniquely integrated safety platform for fleets of every type. That, along with our 1800 employees and 15 manufacturing locations, serve customers across North America, Europe and Asia. We innovate and deliver the smart solutions that fleets will need to survive and thrive in a changing world – and ensure that drivers, passengers and pedestrians arrive home safely.

**ACCESS**  
1.800.827.3692  
[rom.orders@safefleet.net](mailto:rom.orders@safefleet.net)



SCAN QR CODE TO LEARN MORE



FOLLOW US ON SOCIAL MEDIA

**LEARN MORE @ [SFTRUCKANDTRAILER.NET](https://sftruckandtrailer.net)**

FM-8.2-3001 / Rev C / 04-02-24

Copyright ©2024 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes. **IMPORTANT NOTICE:** No system can prevent all incidents. Inattentive drivers, weather, erratic student behavior, and other factors can inhibit detection and overall system performance. Drivers must always keep proper lookout.

1.877.630.7366  
[safefleet.net](https://safefleet.net)

**SAFE FLEET**  
*Driving Safety Forward™*