

# EXPERIENCED. DEDICATED. AUTHENTIC.

### NEW NAME, SAME GET IT DONE.

Safe Fleet Truck & Trailer brings together the brands you trust with the team you know. The familiar faces that have gotten to know you and your business have not changed.

Our commitment to bring you products and solutions that deliver innovation, value, and safety – continues to drive us.

We're raising the bar, setting a higher standard, sacrificing nothing to bring you – the next idea before it becomes the industry norm.

### **BRANDS YOU TRUST**











SEON



### ACCESS PRODUCTS

Safe Fleet Truck & Trailer Access brings a product offering together with serious history. Bustin and ROM have been manufacturing top notch walkramps, platforms, steps and ladders for nearly 160 years collectively. Randall Access joined the party in 2013. Together these brands bring you innovation, engineering, and attitude that works as hard as you. We're with you on the road to #GetltDone.







### STRAIGHT WALKRAMPS

Bustin Gladiator
Randall Straight Walkramp
ROM RoadwarrioR™
ROM RoadwarrioR™ Low Profile

### FOLDING WALKRAMPS

Randall Folding Walkramp ROM SidekicK

### **PLATFORMS**

Bustin F100 Series
Bustin F600 Series
Bustin Slide & Go
Bustin Split Platform
Bustin TAP 200
Bustin TSAP 210A
Randall 3123L
Randall FDP 3136LR
Randall FDP4128LH
ROM RoadwarrioR™ R3 & R4

### STEPS & LADDERS

Bustin Slide-Away™ Steps Bustin Ladder System ROM SideStep™ Ladder





### WALK SURFACE

We have a surface that meets your climate and traction needs.

### PANEL OPTIONS

LIFT ASSIST

You want to assist the lift but not

over-extend it. Tip: Measure from the top of the enclosure to the deck floor.

How do you like your panels? Fixed, replaceable, or reversible?

### BUSTIN GLADIATOR WALKRAMP

Lightweight, all-welded design, go-getter



	SPECIFICATIONS						
RAMP LENGTH	RAMP WIDTH	USABLE WIDTH	RAMP HEIGHT	RECOMMENDED DECK HEIGHT	APPROXIMATE WEIGHT	LOAD CAPACITY	
16'	25 %"	24"	4 ½"	57"-64"	105 lbs.	1000 lbs.	
14'	25 %"	24"	4 ½"	48"-56"	91 lbs.	1000 lbs.	
12'	25 %"	24"	4 ½"	40"-47"	80 lbs.	1000 lbs.	
10'	25 %"	24"	4 ½"	31"-39"	68 lbs.	1000 lbs.	
8'	25 %"	24"	4 ½"	22"-30"	56 lbs.	1000 lbs.	

### RANDALL STRAIGHT WALKRAMP

Highly engineered, ultra-durable, safety walkramp



SPECIFICATIONS								
NOMINAL RAMP LENGTH	RAMP WIDTH	USABLE WIDTH	RAMP HEIGHT	RECOMMENDED DECK HEIGHT	APPROXIMATE WEIGHT	LOAD CAPACITY		
16'	31"	29 5/8"	4 %"	56"-66"	145 lbs.	1000 lbs.*		
16'	26 ¼"	24 %"	4 %"	56"-66"	125 lbs.	1000 lbs.*		
14'	26 ¼"	24 %"	4 %"	46"-55"	112 lbs.	1000 lbs.*		
12'	26 ¼"	24 %"	4 %"	40"-45"	94 lbs.	1000 lbs.*		
10'	26 ¼"	24 %"	4 %"	31"-39"	78 lbs.	1000 lbs.*		
8'	26 ¼"	24 %"	4 %"	26"-30"	63 lbs.	1000 lbs.*		

<sup>\*</sup> Testing of ramps was conducted between 15 and 20 degrees. Load tests were conducted with a 500 lbs. load and 225 lb. driver.

### ROM ROADWARRIOR™ WALKRAMP

Time-tested, reversible, ready-to-get-to-work walkramp



	SPECIFICATIONS							
RAMP LENGTH	RAMP WIDTH	USABLE WIDTH	RAMP HEIGHT	RECOMMENDED DECK HEIGHT	APPROXIMATE WEIGHT	LOAD CAPACITY		
16'	25 %"	24"	4 ½"	57"-64"	105 lbs.	1000 lbs.		
14'	25 %"	24"	4 ½"	48"-56"	91 lbs.	1000 lbs.		
12'	25 %"	24"	4 ½"	40"-47"	80 lbs.	1000 lbs.		
10'	25 %"	24"	4 ½"	31"-39"	68 lbs.	1000 lbs.		
8'	25 %"	24"	4 ½"	22"-30"	56 lbs.	1000 lbs.		

### ROM ROADWARRIOR™ LOW PROFILE (LP) WALKRAMP

Quality, durability, performance for straight truck bodies



		SPECIFI	CATIONS		
RAMP LENGTH	RAMP WIDTH*	RAMP HEIGHT	MODEL R	MODEL C	RECOMMENDED DECK HEIGHT
16'	25 <sup>5</sup> /16"	3 ¾"	16' 6 <sup>5</sup> / <sub>16</sub> "	16' 8 %"	57"-64"
14'	25 <sup>5</sup> /16"	3 3/4"	15' <sup>3</sup> / <sub>16</sub> "	15' 1 %"	47"-56"
12'	25 <sup>5</sup> /16"	3 3/4"	12' 8 <sup>1</sup> / <sub>16</sub> "	12' 9 ½"	39"-46"
10'	25 <sup>5</sup> /16"	3 ¾"	<b>11</b> ' <b>1</b> <sup>5</sup> / <sub>16</sub> "	11' 2 ¾"	31"-38"

<sup>\*</sup> Maximum widths are shown. Smaller custom sizes are available in 1" increments: 22 <sup>15</sup>/16", 23 <sup>15</sup>/16", 24 <sup>5</sup>/16", and 25 <sup>5</sup>/16"

### RANDALL FOLDING WALKRAMP

Durable, easy on your legs and back, and keeps all ten digits safe



DEPLOYED SPECIFICATIONS							
RAMP LENGTH	USABLE WIDTH	RAMP WIDTH	RAMP HEIGHT	USEABLE SIDE RAIL	RECOMMENDED DECK HEIGHT	APPROXIMATE WEIGHT	LOAD CAPACITY
14'	24 %"	25 %"	4 5/8"	2 1/16"	47"-56"	154 lbs.	1000 lbs.*

<sup>\*</sup> Testing of ramps was conducted between 15 and 20 degrees. Load tests were conducted with a 500 lbs. load and 225 lbs. driver.

OPTIONAL ENCLOSURE SPECIFICATIONS**								
	ENCLOSURE LENGTH	WIDTH & HEIGHT ENCLOSURE BODY	WIDTH & HEIGHT AT DOOR	APPROXIMATE WEIGHT				
	8'	31" x 10 ½"	32" x 12 ½"	196 lbs.				

<sup>\*\*</sup> Randall Access Walkramps also fit all competitive enclosures. Note: Bottom of enclosure to ground must be a minimum of 26 inches.

### ROM SIDEKICK™ FOLDING WALKRAMP

The only reversible folding walkramp available



DEPLOYED SPECIFICATIONS						
NOMINAL RAMP LENGTH	USABLE WIDTH	RAMP WIDTH	RAMP HEIGHT	RECOMMENDED DECK HEIGHTS	APPROXIMATE WEIGHT	LOAD CAPACITY
14'	24 ½"	25 %"	4 %"	37"-64"	154 lbs.	1000 lbs.*

<sup>\*</sup> Testing of ramps was conducted between 15 and 20 degrees. Load tests were conducted with a 500 lbs. load and 225 lbs. driver.

	OPTIONAL ENCLOSURE SPECIFICATIONS						
ENCLOSURE LENGTH	ENCLOSURE LENGTH  WIDTH & HEIGHT WIDTH & HEIGHT AT DOOR APPROXIMATE WEIGHT  ENCLOSURE BODY						
14'	31" x 10 ½"	32 ½" x 12 ¾"	222 lbs.				

### BUSTIN PLATFORMS

MODEL	PLATFORM SIZE	WEIGHT CAPACITY	ATTACHED LADDER	RAMP READY	LADDER READY	SAFETY HANDLE	USE AT FR DOOR	USE AT MDL DOOR
F100	33"W x 26"D	450 lbs.	Optional	No	No	No	No	Yes
F600	52"W x 47"D	600 lbs.	No	Yes	Yes	Yes	No	Yes
Slide & Go *steps optional	33"W x 26"D	600 lbs.	No	No	No	Optional	Yes	Yes
Split Platform	33%"W x 26"D	1000 lbs.	No	Yes	Yes	No	Yes	Yes
Tap 200	31"W x 22"D	500 lbs.	Yes	No	N/A	No	Yes	Consult with OEM
TSAP 210A	31"W x 36½"D	1000 lbs.	Yes	Yes	N/A	No	Yes	Consult with OEM

### BUSTIN F100 SERIES PLATFORM

Middle door, meet your new under floor platform friend



### **FEATURES**

- Platform widths range from 33" to 40"
- Mounts to the trailer frame
- Steel construction
- Aluminum is available
- Serrated, open grating work surface
- Works well with the optional Bustin ladder

SPECIFICATIONS							
MATERIAL	WIDTH	DEPTH	WEIGHT CAPACITY	<b>MOUNTING SIZE</b>			
Steel	33"	26"	350 lbs.	38" W x 48" D			
Steel-Heavy Duty	33"	26"	450 lbs.	38" W x 48" D			
Aluminum	26"	33 ¼"	350 lbs.	38" W x 48" D			
Steel	33"	21"	300 lbs.	38" W x 30" D			
Steel	40"	30"	450 lbs.	45" W x 60" D			
Steel	33"	13"	250 lbs.	35" W x 24" D			

### BUSTIN F600 SERIES PLATFORM

Wider, faster, safer-middle door platform



- Aluminum welded construction
- Serrated, open grating work surface
- Landing dimensions: 52" W x 47" D
- Ramp can be attached to run parallel with the trailer
- Mounts to the trailer frame; enclosure not required

SPECIFICATIONS								
MATERIAL	MATERIAL LANDING WIDTH LANDING DEPTH WEIGHT WEIGHT CAPACITY TRAILER SPECIFICATION							
Aluminum	Aluminum 52" 47" 200 lbs. 600 lbs. Specify if trailer is 96" or 102" wide							

### BUSTIN SLIDE & GO PLATFORM

Space saver, compact design, stability



### **FEATURES**

- Compact, under floor platform
- Use as a platform alone or with the Slide-Away™ step system
- Aluminum construction
- Landing dimensions: 33" W x 26" D
- Requires only 28" of installation space

	SPECIFICATIONS							
MATERIAL	LANDING WIDTH	LANDING DEPTH	TOP OF GRATING	STEPS	PRODUCT WEIGHT	WEIGHT CAPACITY	TRAILER SPECIFICATION	
Aluminum	33"	26"		N/A	170 lbs.	600 lbs.	Platform only	
Aluminum	33"	26"	2" below body	2	205 lbs.	600 lbs. platform;	Includes Slide-Away Step. Ideal mounting height 36"-42"	
Aluminum	33"	26"	crossbars	3	218 lbs.	350 lbs. stairs	Includes Slide-Away Step. Ideal mounting height 44"-52"	

### BUSTIN SPLIT PLATFORM

Works with a ladder or walkramp



### FEATURES

- 1 ½" space between panels allow the platform to straddle floor-support-beams within the tunnel, allowing a robust floor load capacity
- Ramp or ladder ready
- Mounts in trailer floor
- Working capacity: 1,000 lbs.

SPECIFICATIONS							
MATERIAL	LANDING WIDTH	LANDING DEPTH	PRODUCT WEIGHT	WEIGHT CAPACITY			
Aluminum	33 %"	33"	74 lbs.	1000 lbs.			
Aluminum	34 ½"	33"	66 lbs.	1000 lbs.			
Aluminum	49"	33"	90 lbs.	1000 lbs.			

### BUSTIN TAP200™ PLATFORM

Pick a door, any door... TAP200 is at your service



### **FEATURES**

- Platform: Aluminum welded
- Can be used at any side door, in multiple applications
- Integrated ladder with 4 steps
- Modular construction each step is field replaceable
- Integrated ladder with 4 steps
- Ladder folds flat inside the enclosure
- Enclosure sold separately

SPECIFICATIONS							
MATERIAL	LANDING WIDTH	LANDING DEPTH	TOP OF GRATING	STEPS	PRODUCT WEIGHT	WEIGHT CAPACITY	
Aluminum	31"	22"	56 ½"	4	68 lbs.	500 lbs.	


### BUSTIN TSAP210 PLATFORM

Also known as "The Double Deck"



- Expansive 30  $^{15}/_{16}$ "W x 36  $\frac{1}{3}$ "D platform surface
- Extruded aluminum
- Optional integrated ladder with 4 steps
- Modular construction: each step is field replaceable
- Ladder folds flat inside the enclosure
- Ramp and ladder ready design

SPECIFICATIONS							
MATERIAL	LANDING WIDTH	LANDING DEPTH	TOP OF GRATING	STEPS	PRODUCT WEIGHT	WEIGHT CAPACITY	
Aluminum	30 15/16"	36 1/3"	57"	4	110 lbs.	1000 lbs.	

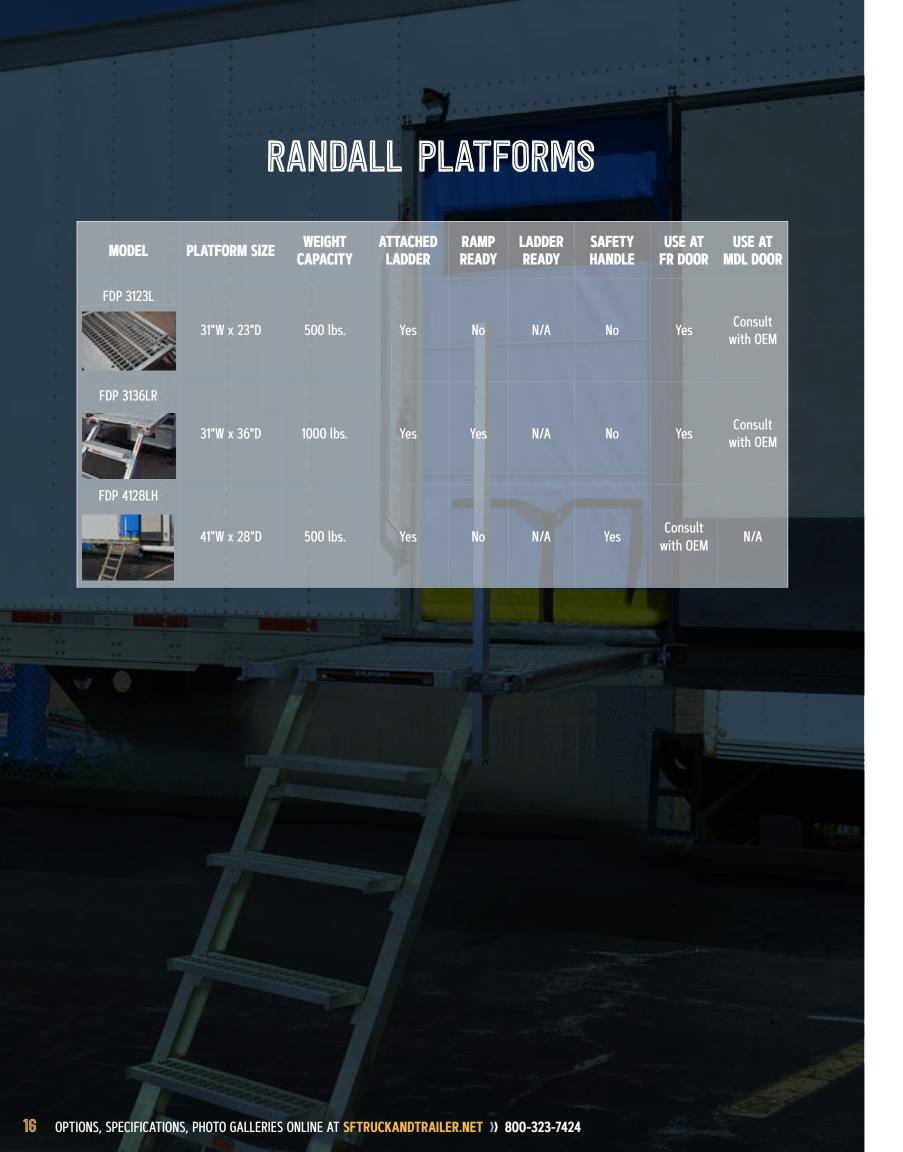

### RANDALL FDP 3123L

Floor Deployed Platform (FDP) side door delivery



### **FEATURES**

- 31"W x 23"D platform surface
- Extruded Aluminum, 6061 T6 alloy
- Randall's signature gripping, all-weather surface on platform and steps
- Integrated ladder with 4 steps; folds into tunnel with platform
- Slider pads and rollers for easy deployment and stowage

SPECIFICATIONS							
MATERIAL WILLIAM DEVIA DEL KARIGATA						WEIGHT CAPACITY	
Aluminum 6061 T6	31"	23"	44" - 49" 50" - 56" 48" - 56"*	3"	360 lbs.	500 lbs.	

<sup>\*</sup> Note: The adjustable ladder model accommodates varying deck heights from 48" to 56"

### RANDALL FDP 3136LR

36" deep, integrated ladder and ramp ready—Let's get to work



- 36" deep work surface
- Integrated ladder
- 1,000 lb working capacity
- Ramp ready
- Randall's signature gripping, all-weather surface on platform and steps
- Slider pads for easy deployment and stowage

SPECIFICATIONS							
MATERIAL	WIDTH	DEPTH	DECK HEIGHTS	REQUIRED TUNNEL HEIGHT	WEIGHT W/ TUNNEL	WEIGHT CAPACITY	
Aluminum 6061 T6	31"	36"	50" - 56"	4"	470 lbs.	1000 lbs.	

### RANDALL FDP 4128LH

3 points of contact—built in



### **FEATURES**

- Expansive 41" wide and 28" deep work surface
- Grab handle ensures three points of contact
- Can be installed on 3" thick insulated floors
- Randall's signature gripping, all-weather surface on platform and steps
- Slider pads for easy deployment and stowage

SPECIFICATIONS							
MATERIAL	WIDTH	DEPTH	DECK HEIGHTS	REQUIRED TUNNEL HEIGHT	WEIGHT W/ TUNNEL	WEIGHT CAPACITY	
Aluminum 6061 T6	41"	28"	50" - 56"	3"	80 lbs.	500 lbs.	

### ROM ROADWARRIOR™ PLATFORM SYSTEM

All the features of the RoadwarriorR walkramp—in a platform



	- 00
FEATURES	V1.1072
The R3-ITF F tfol	Symmetric or ists a two girder sembles, two planks and rail
tubes, two gilder a	embles, two planks and rail

The R4-ITF and R4 Rising Platform System consists of two girder tubes, two girder assemblies, two planks, and rail assembly.

- Welded steel girder construction
- Planks include lightweight cast-magnesium anti-slip gratings
- Aluminum aprons and rails and steel bolted construction
- Galvanized steel carriers

R3-ITF PLATFORM SYSTEM					
<b>PLANK SIZE OPTIONS</b>	<b>WEIGHT CAPACITY</b>				
40 ½" or 41"	1500 lbs.				

R4-ITF PLATFORM SYSTEM					
PLANK SIZE OPTIONS	WEIGHT CAPACITY				
41" or 47 %" or 59 %"	2000 lbs.				




### BUSTIN SLIDE-AWAY™ RETRACTABLE STEP SYSTEM


Widely used, self-cleaning, deploys and stows in seconds



### **FEATURES**

- Welded steel construction
- Bolt-on or weld-on configurations
- Standard finish is red, black available upon
- Galvanized finish available on select models
- Rear and side door placement
- Weight: 30 lbs.
- Weight capacity: 350 lbs.

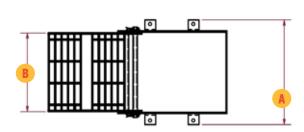



SPECIFICATIONS								
REFERENCE	A	В		C	D			
DESCRIPTION	TOTAL WIDTH	STAIR WIDTH	TREAD DEPTH	CLOSED LENGTH	OPEN LENGTH	WEIGHT		
Bolt on 2-step	19 ¼"	14 ½"	6 1/16"	20"	33"	32 lbs.		
Weld on 2-step	19 ¼"	14 ½"	6 1/16"	20"	33"	28 lbs.		
Bolt on 3-step	19 ¼"	14 ½"	6 1/16"	34"	56 ½"	50 lbs.		
Weld on 3-step	19 ¼"	14 ½"	6 1/16"	34"	56 ½"	46 lbs.		
Bolt on 2-step	31 ¼"	26 ½"	6 1/16"	20"	33"	46 lbs.		
Weld on 2-step	31 ¼"	26 ½"	6 1/16"	20"	33"	42 lbs.		
Bolt on 3-step	31 ¼"	26 ½"	6 1/16"	34"	56 ½"	60 lbs.		
Weld on 3-step	31 ¼"	26 ½"	6 1/16"	34"	56 ½"	56 lbs.		
Bolt on 1-step	31 ¼"	26 ½"	6 1/16"	11 ¾"	16 ½"	32 lbs.		
Weld on 1-step	31 ¼"	26 ½"	6 1/16"	11 ¾"	16 ½"	27 lbs.		

### BUSTIN LADDER & PLATFORM SYSTEM

Versatility, portability, lightweight ladder & platform system



### **FEATURES**

- Bustin portable ladder-equipped with stainless steel hooks to attach to the flat bar strap mounted on the outside of the trailer.
- Add a platform to the ladder and you have an all-in-one system that's portable, versatile, and weighs less than 50 lbs.
- The optional carrier locks the ladder and platform system in place

PORTABLE LADDER SPECIFICATIONS							
MATERIAL	HEIGHT RANGE	STEPS	WEIGHT	WEIGHT CAPACITY			
Aluminum	52 ½"	4	26 lbs.	350 lbs.			

LADDER & PLATFORM COMBO SPECIFICATIONS							
MATERIAL LANDING WIDTH LANDING DEPTH STEPS PRODUCT WE				PRODUCT WEIGHT	WEIGHT CAPACITY		
Aluminum	21" - 40"	18" - 21 <sup>3</sup> / <sub>16</sub> "	4	40-45 lbs.	350 lbs.		

### ROM SIDESTEP™ PORTABLE LADDER

High-strength, high-mobility, high-performer



- Constructed of lightweight aluminum
- Works on heights up to 56", hooks are 13 ½" apart
- Ratchet and pawl system adjusts to uneven surface
- Double handrails provide enhanced stability
- Adjustable step angles ensure safe footings
- Optional fully enclosed carrier

SPECIFICATIONS				
MATERIAL	HEIGHT RANGE	STEPS	WEIGHT	WEIGHT CAPACITY
Aluminum	56"	4	27 lbs.	350 lbs.

### INSULATED BULKHEADS

BH2000

CoolGuard

Z Shape

Van Bulkhead

VersaFit

### CENTER DIVIDE SYSTEM

### TRAILER CURTAINS REAR DOOR

Rear Roller Curtain (RRCV) Rear Pull Down Curtain (RPDC)

Quick Release Curtain

Rear Strip Door Curtain

### TRAILER CURTAINS SIDE DOOR

Side Roller Curtain (SRCV) Side Pull Down Curtain (SPDC) **Gravity Curtain** Side Strip Door Curtain

### INSULATED COVERS & CONTAINERS

Pallet Covers, Blankets & Cart Covers Insulated Bags **Durable Insulated Containers** 

### TEMP CONTROL PRODUCTS



Randall Temp Control products have been helping to keep products in-transit at the proper temperatures for over thirty years. From Industry-leading bulkheads and innovative curtains to insulated covers and containers – each highly engineered and made to fit your specifications.

### THE BULKHEAD LINEUP


### BH2000

THE insulated bulkhead with the best perimeter seal on Earth

Ballistic, aka Toughest,

### ONE-OF-A-RIND

Superior life, replaceability, durability

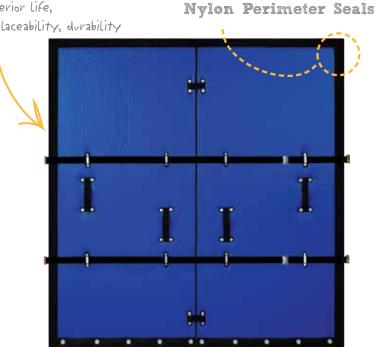

### **FEATURES**

### CORE

 Superior insulation value

- Skid Guard: 6" or 12"
- Replaceable Ballistic nylon perimeter seals

STRONGEST SKID GUARD AVAILABLE

with recessed hardware

### **SEALS & HARDWARE**

- Ballistic nylon center hinge and perimeter

### COOLGUARD

Light on weight, strong on performance



DOUBLE reinforced, DOUBLE laminated, smooth surface

### FEATURES

### CORE

- Vertical stiffening rods,
- 2 per half, 4 per bi-fold • 3" closed cell foam
- Water resistant

- Entire perimeter is heat
- 18 oz vinyl hinges
- Logistic straps and handles, standard

### Z SHAPE

Odd or even pallets, the Z shape conforms in a snap

High Superior perimeter Performance seals, skid quard Features and hardware



conforms to odd pallets



### **FEATURES**

- Closed cell foam • Blue, 18 oz vinyl
- 10" UHMW skid quards; Superior insulation one piece extruded construction
- Water resistant

### SEALS & HARDWARE EXTERIOR

- Recessed hardware prevents damage
- Ballistic nylon hinges and perimeter seals are replaceable

### VERSAFIT


One size can fit all with the VersaFit

### COMPRESSION

### HINGE

accommodates 2" width variances

ACCORDION

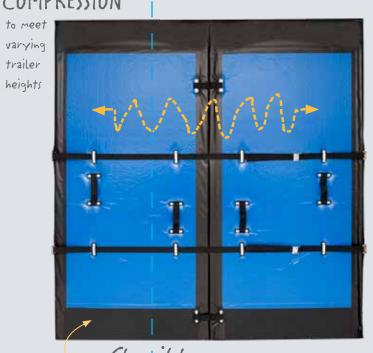

Flexible laminated smooth with SKID GUARD no Fasteners to catch

### FEATURES

- Vertical stiffening rods, 2 per half, 4 per bi-fold
- 3" closed cell foam
- Water resistant

### EXTERIOR

### • Blue, 18 oz vinyl

- Flexible skid guard (VHMW plastic skid guard
- Flexible, UniSeal top for height adjustment Adjustable center
- Additional options accommodates width adjustment

SEALS & HARDWARE

Logistic straps and

handles, standard

Reinforced hinges,


### DELIVERY VAN


We fit all delivery van makes, models, and sizes

### ONE-OF-A-RIND Modular Design

Superior life,

Ballistic, aka Toughest, Nylon Perimeter Seals

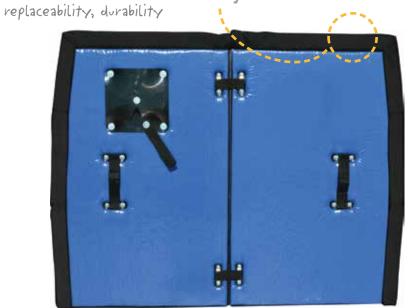



CUSTOM MANUFACTURED FOR EVERY MAKE & MODEL

### **FEATURES**

### CORE

- 3" closed cell foam
- Superior insulating
- Water resistant

### **EXTERIOR SEALS & HARDWARE** • Blue, 18 oz vinyl

Reinforced hinge and

strain relief straps

- Replaceable Ballistic
- nylon perimeter seals Two handles, standard
- Ballistic nylon perimeter
   Options for
  - customization available

### Water resistant

### Blue, 18 oz vinyl

### 3" closed cell foam

### EXTERIOR

### • Recessed hardware prevents damage

### seals are replaceable


### EXTERIOR


• 10" flexible skid quard 22 oz vinyl perimeter

### SEALS & HARDWARE

### nylon perimeter seals

### RANDALL INSULATED BULKHEADS: THE DIFFERENCE

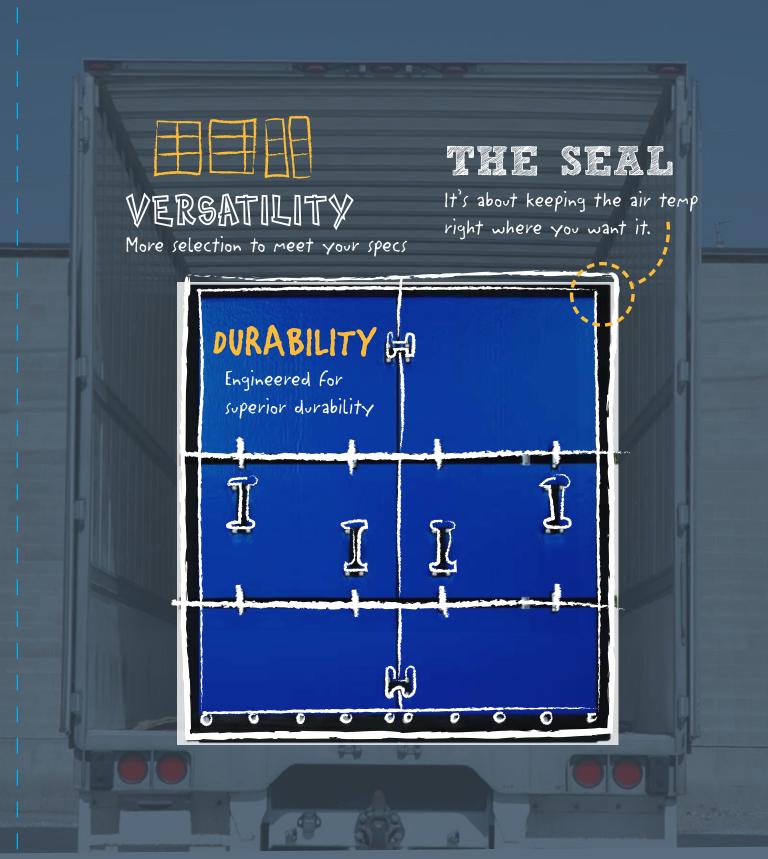

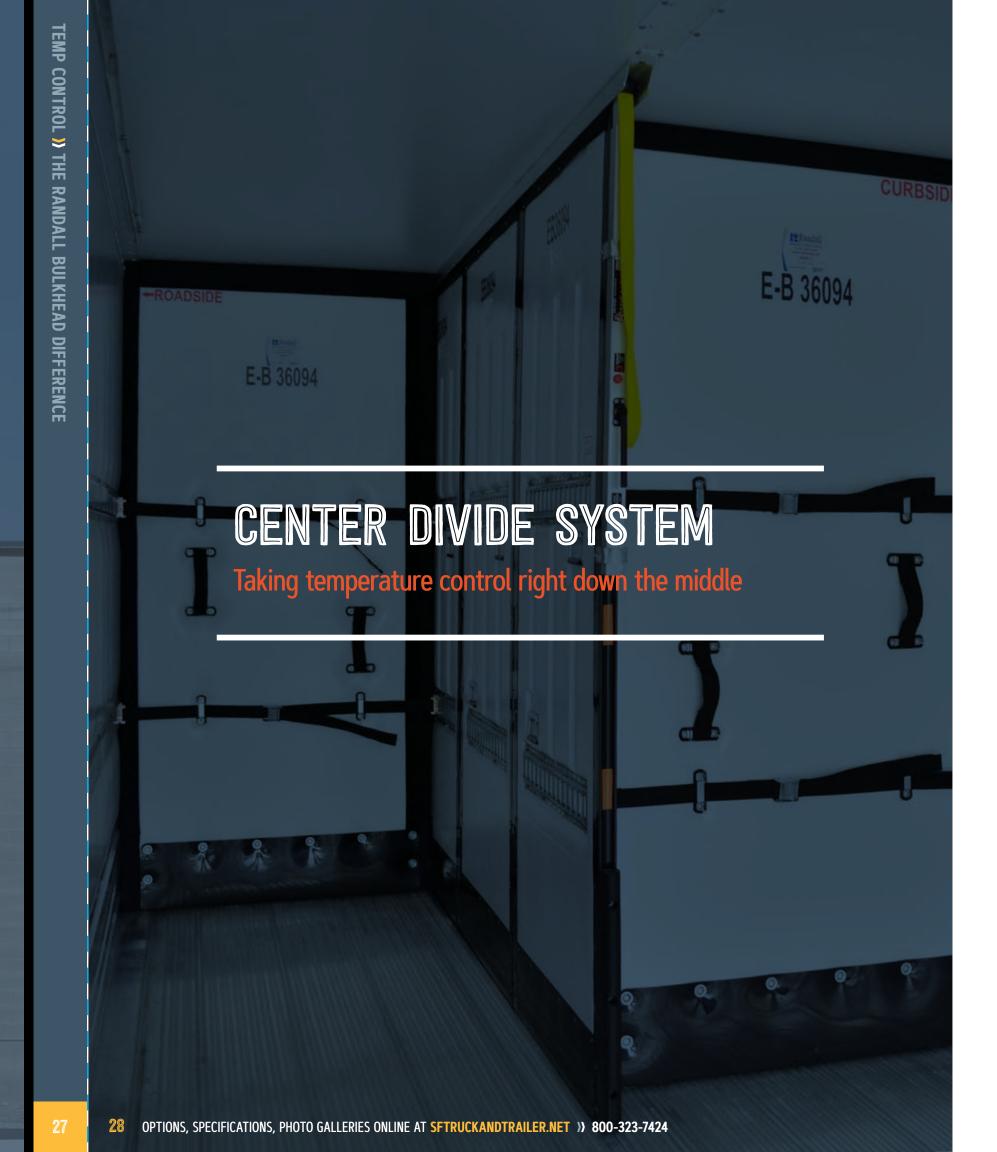





### **FEATURES**

### EXTERIOR

- Recessed airflow channels
- Male/female siderails
- One-piece bottom extrusion
- one piece bottom extras
- Ballistic nylon seals
- No catch, recessed hardware

### OPTIONS

- TPO composite construction (ABS standard)
- Ratchet or hydraulic load bar
- Half bulkheads, including flip-top bulkheads for roll-up doors
- Return air bulkhead
- Air diverter
- 6" or 9" high impact plate
- Last panel with optional aluminum reinforcement


### MORE

- More efficient product staging prior to loading
- More durability over the life of the vehicle.
- More impact resistance
- More ability to "shorten the load"
- More flexibility to reconfigure
- More ease of maneuverability
- More recyclable

### THE REAR TRAILER CURTAIN LINEUP

### REAR ROLLER CURTAIN (RRCV)

Rolls off the side to keep you moving – let's roll

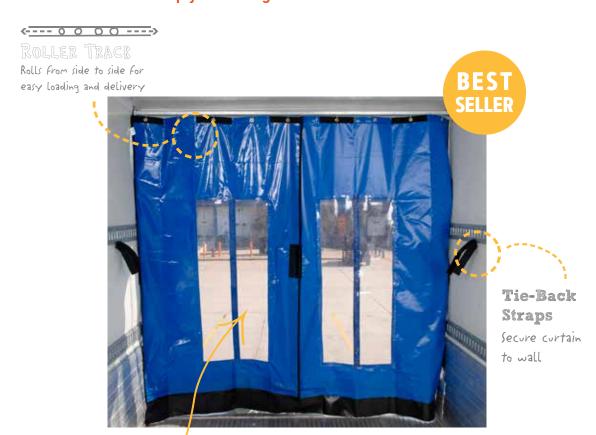

Extra Low Temp Windows Available

### FEATURES

### **EXTERIOR**

- 18 oz commercial grade vinyl
- Trimmable vinyl sweep
- 22" x 52" clear view window
- Opens in center

### HARDWARE & SECUREMENT OPTIONS

- Roller track and side brackets
- Chain-weighted for stability
- Velcro® tabs secure curtain to sidewall
- Extra low temperature window
- Center magnets to secure center-split curtain, instead of
  - Web straps or e-clips to secure the curtain to the sidewall
  - Cordura nylon material for enhanced durability
  - Insulated core for extra low temperature applications

### REAR PULL DOWN CURTAIN

Easy up, easy down, locks in place



### FEATURES

### EXTERIOR

- 18 oz commercial grade vinyl
- 22 oz trimmable vinyl sweep
- Clear view window
- Two pull straps for loading dock and ground floor operation
- Accommodates swing and rollup door operation

### HARDWARE & SECUREMENT ADVANTAGES

- Locking brackets secure curtain
- Hi-vis orange guard bar protects curtain from frontal

- unobstructed, non-invasive pass through for drivers and loaders
- · Tight perimeter seals provide superior temperature control
- Easy installation with minimal components

### QUICK RELEASE CURTAIN

Go ahead - hit it - the curtain releases without tearing

### STATIONARY OR MOVABLE MOUNTS

Accommodates all types of door systems

CHAIN

Prevents curtain From sailing in all types of weather



### BREAK-AWAY GROMMETS


150 pound tear strength; easily reinstalled

> CUSTOM MADE & REPLACEABLE Fits each door's dimensions;

> > individual

strips are


replaceable

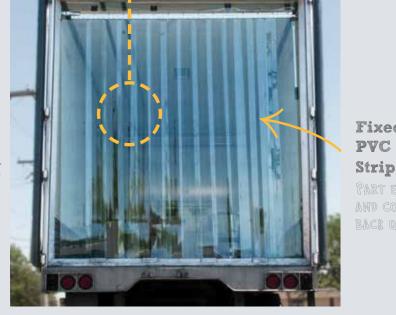

### REAR STRIP DOOR CURTAIN

**Economical. Effective. Versatile.** 

OVERLAPPING DESIGN PREVENTS LEAKAGE

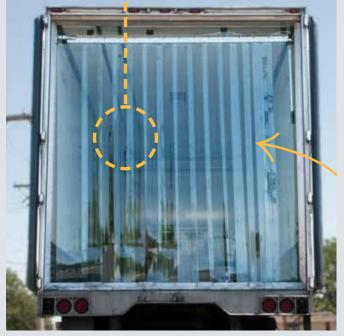

Strips

Fixed

### **FEATURES**

### **EXTERIOR**

- 18 oz commercial grade vinyl
- 150 pound tear strength to disengage the curtain
- 22" x 52" clear view window
- Trimmable vinyl sweep

### HARDWARE & SECUREMENT

- Galvanized steel pipe and side brackets included
- Stationary or movable mounts
- · Chain weighted for stability
- Secured to side logistic track with magnets

- Strip Door System includes: overlapping, custom-cut pvc strips, and mounting hardware
- Can be used with conventional roll-up doors or swing doors
- Variety of configurations -
- Optional Hard Wire and Low Temp strips provide additional



### SIDE ROLLER CURTAIN (SRCV)

SRCV moves from side to side on rollers

<----> ROLLER TRACK

Rolls from side to side for easy loading and delivery

### WALL TABS Easily pushed aside and secured to wall

Velcro®

### **FEATURES**

### **EXTERIOR**


- 18 oz commercial grade vinyl
- Trimmable vinyl sweep
- Roller track and side brackets included
- Chain-weighted for stability
- Velcro® tabs secure curtain to sidewall

### **OPTIONS**

- Extra low temperature window
- Web straps or e-clips to secure the curtain to the sidewall
- Cordura nylon material for enhanced durability

### GRAVITY CURTAIN

May the force of gravity be with you - at the side door

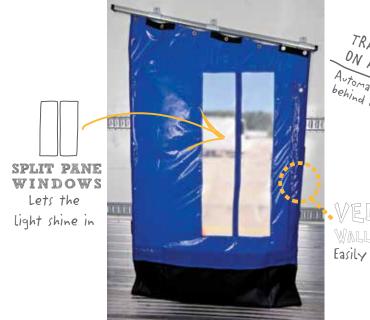

Easily secures to wall

### FEATURES

### EXTERIOR

- 18 oz commercial grade vinyl
- 22 oz vinyl, trimmable sweep
- 22" x 52" extra low temperature split-pane windows


### HARDWARE & SECUREMENT

- Hardware and trolley system included
- Fastens to sidewall with Velcro®
- Chain weighted to prevent sailing
- Curtain and hardware weigh 25 lbs

### SIDE PULL DOWN CURTAIN (SPDC)

LARGE CLEAR VIEW WINDOW

Easy up, easy down, locks in place

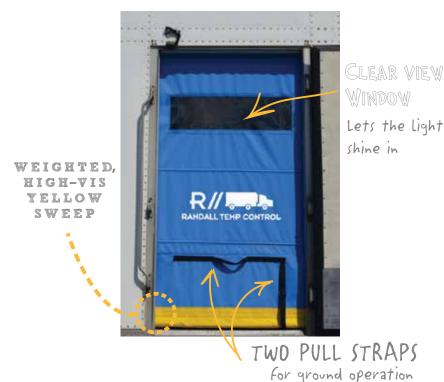

### **FEATURES**

### **EXTERIOR**

- 18 oz commercial grade vinyl
- 22 oz trimmable vinyl sweep
- Clear view window
- Two pull straps for loading dock and ground floor operation

### HARDWARE & SECUREMENT

- Integrated side wall brush assembly
- Locking brackets secure curtain in stowed position

### **ADVANTAGES**

- Retractable design provides an unobstructed, non-invasive pass through for drivers and loaders
- Tight perimeter seals provide superior temperature control
- Easy installation with minimal components

### Overlapping Design Prevents Leakage

### SIDE STRIP DOOR CURTAIN

**Economical. Effective. Versatile.** 

dimensions;

individual

strips are

replaceable

# Fits each door's

FIXED PVC Strips Part easily and come back quickly

- Strip Door System includes: overlapping, custom-cut pvc strips, and mounting hardware
- Optional Hard Wire and Low Temp strips provide additional protection

### INSULATED PALLET COVERS, BLANKETS & CART COVERS

Protect your perishable and temperature-sensitive products

### MAXIMUM THERMAL PROTECTION

Protects pallet loads of temperature-sensitin or perishable products



Pictured: 48" pallet cover, standard material

COMMER VELCRO®	CIAL

Secure binding and durable materials

REUSABLE

Stores flat and easy to keep clean

STANDARD MATERIAL	HEAVY-DUTY MATERIAL	SIZES
OUTER SHELL: 400 denier nylon, polyurethane coated	OUTER SHELL: 600 denier polyester, polyurethane coated; 1000 denier nylon polyurethane coated- available	BLANKETS: 72" x 72" 72" x 96" 96" x 96" 96" x 120"
CORE: Polyester fiberfill insulation – 1 oz/ sq. ft	CORE: Polyester fiberfill insulation – 1 oz/ sq. ft. with polyethylene bubble covered on both sides with aluminum foil facing	CART COVERS: Custom
R- VALUE: R-3 per inch	R-VALUE: R-4 per inch	DRUM COVERS: Custom
CLOSURE: Commercial Velcro®	CLOSURE: Commercial Velcro®	PALLET COVERS: 36" high 48" high 60" high 72" high
COLOR: Navy blue	COLOR: Black	

### INSULATED BAGS

Transport ice cream... and a whole lot more



### **SIZES**



- IC 2: holds two 3-gallon ice cream drums. 20" x 11" x 11"
- IC 4: holds four 3-gallon ice cream drums, 20" x 11" x 22"
- IC 6: holds six 3-gallon ice cream drums, 30" x 11" x 22"
- Custom sizes available

### **SPECIFICATIONS**



- Outer shell: 600 Denier nylon with a Ballistic nylon bottom
- Core: high density foam covered with washable vinyl
- Closure: zippered lid with heavy-duty Velcro®
- Color: black

### **OPTIONS**



- Document pouch
- Logo
- Additional handles and straps
- Temperature probe pockets

### DURABLE INSULATED CONTAINERS

Insulated, reusable, high impact containers



### **CHEST STYLE MODELS**

MODEL	INTERIOR DIMENSIONS	EXTERIOR DIMENSIONS
HR11P2-LC	36.5" x 21" x 24"	43" x 27.5" x 39.5"
HR27P	41" x 37" x 29"	48" x 43" x 40.5"
HR30P	41" x 37" x 31"	48" x 43" x 41.5"
HR32P	41.5" x 37" x 36"	47.5" x 43.5" x 49"

### **UPRIGHT STYLE MODELS**

MODEL	INTERIOR DIMENSIONS	EXTERIOR DIMENSIONS
HR28P-DC	42" x 21" x 50"	48" x 27" x 65"
HR54P	42" x 34" x 64"	48" x 40" x 77"



### 5" Monitor 7" Monitor with Wired Side Cameras

### VIDEO & CAMERA SOLUTIONS

Technology is unlocking new levels of safety, productivity, and security for truck and trailer fleets. Today, we have the ability to **see** potential obstacles in blind spots, **protect** drivers and identify safe driving practices, and **secure** inventory and equipment.

### WIRED TRAILER & STRAIGHT TRUCK BACKUP CAMERAS

WIRELESS TRAILER & STRAIGHT

TRUCK BACKUP CAMERAS

7" Monitor

Rear View Mirror Monitor

7" Monitor & Audible Rear Sensors\*

Rear View Mirror Monitor with Surface Mount Rear & Side Cameras\*\*

Rear View Mirror with Surface Mount Rear Cameras\*

DS2 DUAL CAMERA EVENT RECORDING SYSTEM

STRAIGHT TRUCK - 360° AROUND VEHICLE MONITORING SYSTEM

\*Straight trucks only \*\*Trailers only

### WIRELESS 5" MONITOR

Instantly pair with 100' digital wireless range - at highway speeds



### FEATURES

- Digital wireless transmission up to 100'
- High resolution LCD, 5" full color monitor
- Rear camera 130° viewing angle
- Automatic pair of monitor to camera at a push of a button


### WIRELESS 7" MONITOR

External wired side cameras provide additional safety views



### FEATURES

- Digital wireless transmission up to 100'
- High resolution LCD 7" full-color monitor
- Rear camera 130° viewing angle
- Automatic pairing of monitor to camera at a push of a button
- Side cameras 120° view area with infra-red illuminators

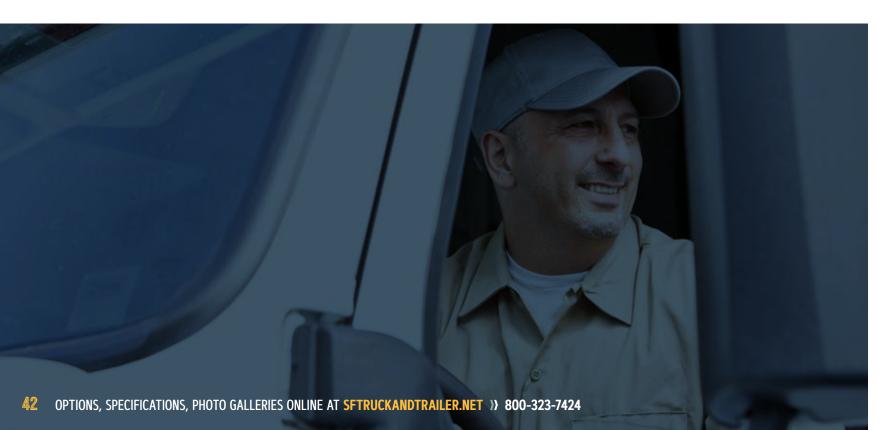

### WIRED 7" MONITOR

Comes with quick connect/disconnect cabling



### **FEATURES**

- 7" TFT LCD color monitor
- Rear camera 130 degree viewing angle with infra-red illuminators
- 3 channel multiplexer
- Quick connect/disconnect cabling
- 20G vibration and 100G impact rating

### REAR VIEW MIRROR MONITOR

130° viewing angle with 18 infa-red illuminators



### **FEATURES**

- 7" TFT LCD digital mirror monitor
- Rear camera 130° viewing angle with infra-red illuminators
- 3 channel multiplexer
- Quick connect/disconnect cabling
- 20G vibration and 100G impact rating

### REAR VIEW MIRROR, WIRED SURFACE MOUNT REAR & SIDE CAMERA SYSTEM

Side cameras feature 120° viewing area with night vision



- Exclusively for Trailers
- 7" TFT LCD digital mirror monitor
- Surface mounted rear camera
- 3 channel multiplexer
- Quick connect/disconnect cabling
- Surface mount side cameras made from heavy-duty zinc

### 7" MONITOR WITH INTEGRATED REAR SENSORS

Backup sensors audibly alert potential hazards



### FEATURES

- Exclusively for Straight Trucks
- 7" LED Digital Panel Color Monitor with sharp resolution
- Rear camera 130° viewing angle
- 18 infra-red lights allow night vision up to 50'
- Audible sensors integrate directly into camera system
- Sensor information on same monitor as backup camera

### REAR VIEW MIRROR & SURFACE MOUNT BACKUP CAMERA SYSTEM

Compact design with 170° viewing angle



### **FEATURES**

- Exclusively for Straight Trucks
- 7" TFT LCD digital mirror monitor
- Surface mounted rear camera
- $\bullet~$  Ultra-wide viewing angle of 170°  $\,$

### DS2 DUAL CAMERA EVENT RECORDING SAFETY SYSTEMS

In-cab camera technology promotes a culture of safety



### **FEATURES**

- Integrated video, telematics, and vehicle operating data on a single screen
- Driver behavior: hard braking, hard stops, hard acceleration, idling time, time, location, and sudden deceleration
- Built-in G-force sensors, GPS, and audio
- Ability to playback video before, during, and after an incident
- Continuous and event-based recording
- Cloud upload feature available with subscription service
- Built-in digital video recorder (DVR) with SD card capacity up to 512GB

### 360° AROUND VEHICLE MONITORING SYSTEM

InView 360 eliminates blind spots & promotes safety



- Exclusively for Straight Trucks
- 360° view around vehicle
- Recording and storing of video and telematic data
- Playback and archive video
- Map-based video search

## TRUCK POWER UNIT PRODUCTS

We've been spending a lot of time at the back of the trailer – with our Temp Control & Access products. We're growing up – we've moved to the head of the class with our Truck Power Unit Access products. It's a mouthful – TPUA for short.

Our array of TPUA products are manufactured right here in the U.S.A. with the highest quality aluminum alloys and walk surfaces that grab on to those shoes and won't let go until we hear "uncle."

We speak fluent safety here. As with our all our Access products, we're focused on keeping drivers safe, confident, and getting in and out of their saddle quickly.

### BUSTIN DECK PLATE

Available in two models – regular (sits on top of frame rails) and low rider (sits between frame rails). Each plate features our serrated, slip-resistant surface.

### BUSTIN FRAME STEP


Made of sturdy, lightweight aluminum. Available with and without pre-drilled holes for ease of installation.

### BUSTIN GRAB HANDLE

Give yourself a boost with the Bustin grab handle available in several sizes.

### BUSTIN FUEL TANK STEPS

Snow, mud and debris won't build up on these fuel tank steps. In addition, these steps offer superior slip resistance. Specify with OEM.

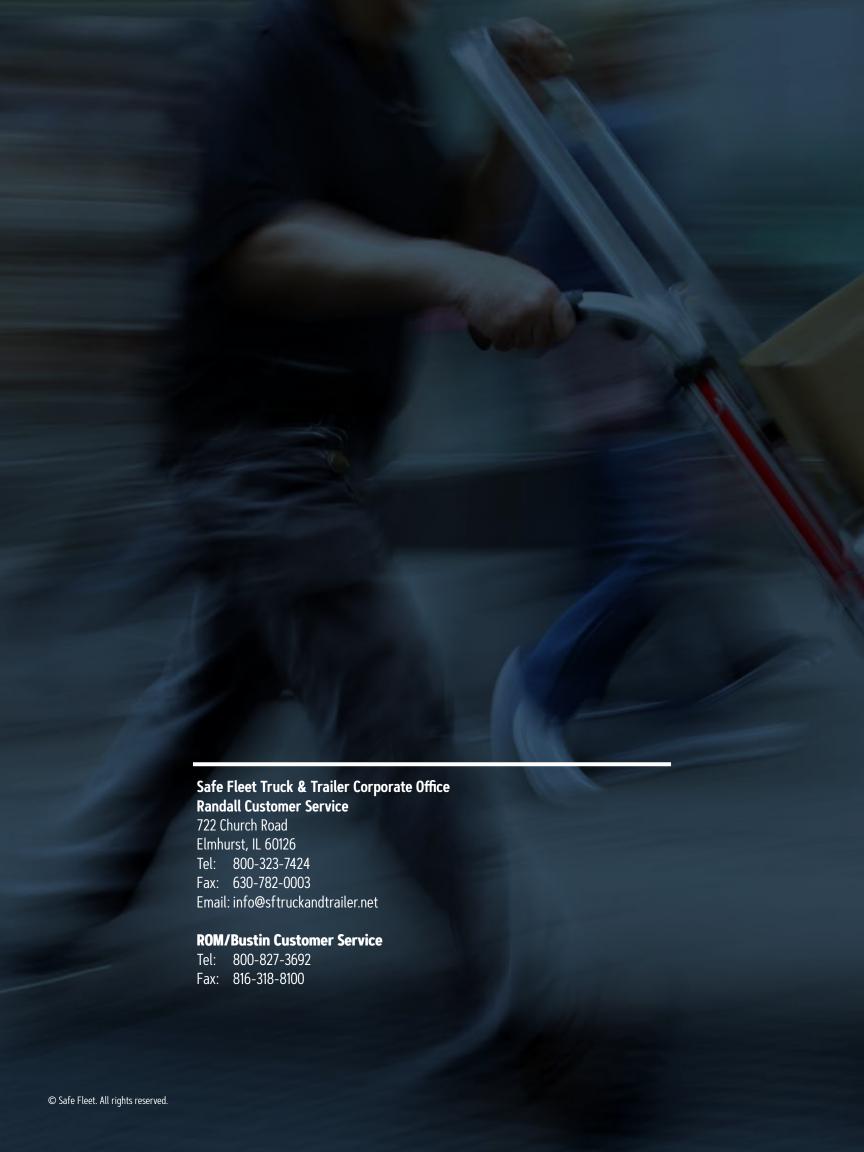

# #GETITDONE

Truck & Trailer

sftruckandtrailer.net

FM-8.2-336 / Rev A / 10-10-17

All Rights Reserved

722 Church Road • Elmhurst, IL 60126 800-323-7424 • info@sftruckandtrailer.net