


# FDP 4128LH Platform



The Only Platform with Three Points of Contact Built-In

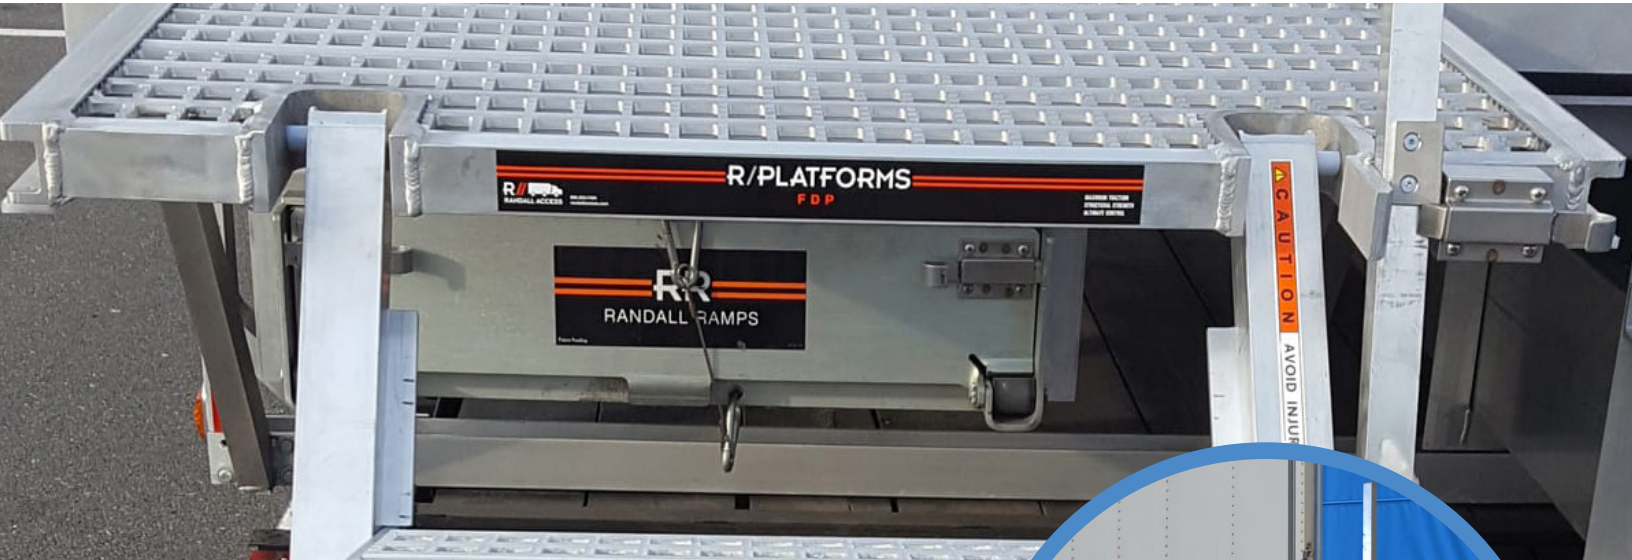

Provides drivers with extra space for increased productivity with greater safety.



- All-weather surface provides superior continuous traction
- The platform incorporates a grab handle that ensures drivers have three points of contact
- 41" wide and 28" deep walk surface provides more space for drivers to safely unload products

## FDP 4128LH Specifications

MATERIAL	WIDTH	DEPTH	DECK HEIGHTS*	REQUIRED TUNNEL HEIGHT	WEIGHT w/o TUNNEL	WEIGHT CAPACITY
Aluminum 6061 T6	41"	28"	50"-56"	3"	80 lbs.	500 lbs.

\*Deck height is measured when trailer is completely installed on the tractor.  
Note: Requires a minimum 42" wide side door. Consult with OEM.

FM-8.2-3008 / Rev B / 04-19-2022

Copyright ©2022 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

1.877.630.7366  
safefleet.net

