

RoadwarriorTM Walkramp

Time-Tested, Reversible, and Reliable Walkramp



Ready to get to work walkramp with proven performance and reliability.



Easy to Repair

Magnesium castings are assembled with non-welded aluminum tie bars & bolted construction, allowing easy field repairs.



Superior Traction

Aggressive traction nodules are staggered across the entire ramp width enhance delivery speed and productivity.




Reversible


Double the ramp's life cycle with the ability to turn it over when one side wears down, revealing a new walk surface.

RoadwarriorR™ Walkramp

Optional Lift Assist

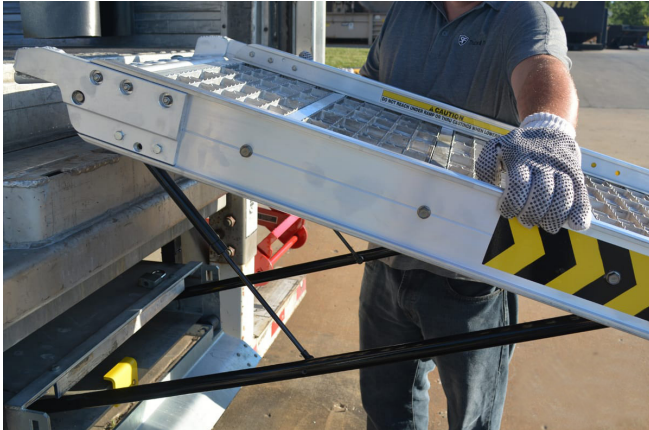

Built-In Stop

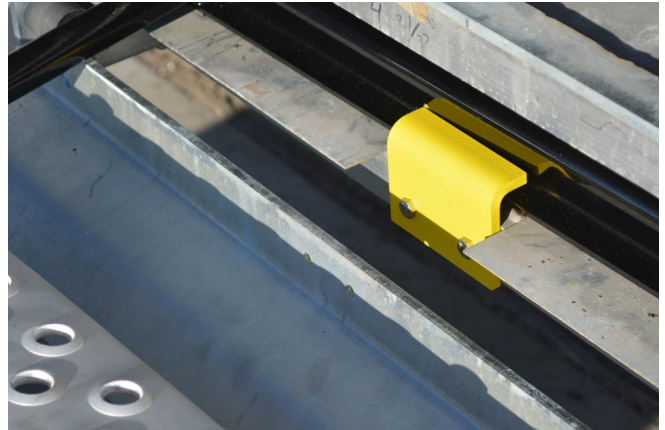

Reversible



Optional Safety Chain



Specifications

RAMP LENGTH	RAMP WIDTH*	USABLE WIDTH	RAMP HEIGHT	RECOMMENDED DECK HEIGHT	APPROXIMATE WEIGHT	LOAD CAPACITY**
16'	26 ¼"	24 ½"	4 ⅝"	57" - 64"	127 lbs.	1000 lbs.
14'	26 ¼"	24 ½"	4 ⅝"	47" - 56"	115 lbs.	1000 lbs.
12'	26 ¼"	24 ½"	4 ⅝"	39" - 46"	98 lbs.	1000 lbs.
10'	26 ¼"	24 ½"	4 ⅝"	31" - 38"	85 lbs.	1000 lbs.
8'	26 ¼"	24 ½"	4 ⅝"	26" - 30"	65 lbs.	1000 lbs.

* Widest outer dimension

**Load tests were conducted with a 400 lbs. load and 250 lb. driver

FM-8.2-240 / Rev D / 03/22/2022

Copyright ©2022 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

R.O.M.
A Safe Fleet Brand

1.877.630.7366
safefleet.net

SAFE FLEET
Driving Safety Forward™